



Exterior Powder Coated to Suit

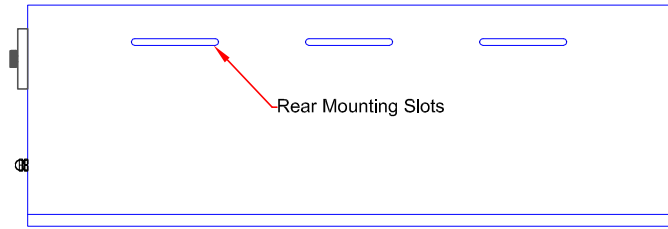


REAR VIEW

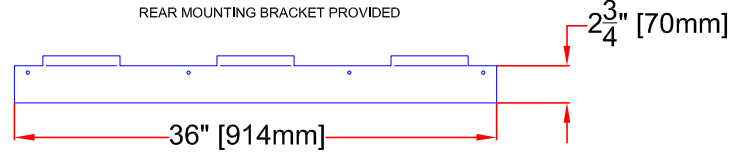

REAR MOUNTING BRACKET PROVIDED


16 5/8" [422mm]

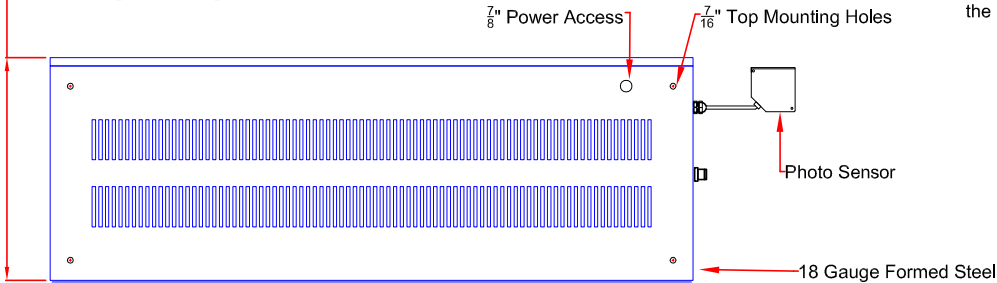


TOP VIEW

Anchoring bracket 2 provided. Secure to the side or the top of the cabinet with self drilling screws

Sensor Mounting Bracket-2 Provided





Reflector-1 Provided

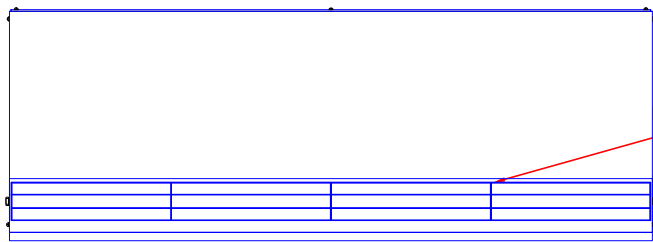

BOTTOM VIEW

FULL LENGTH ARTICULATING NOZZLE

3" Minimum Clearance to ceiling
TOP AND FRONT AIR INTAKE STANDARD

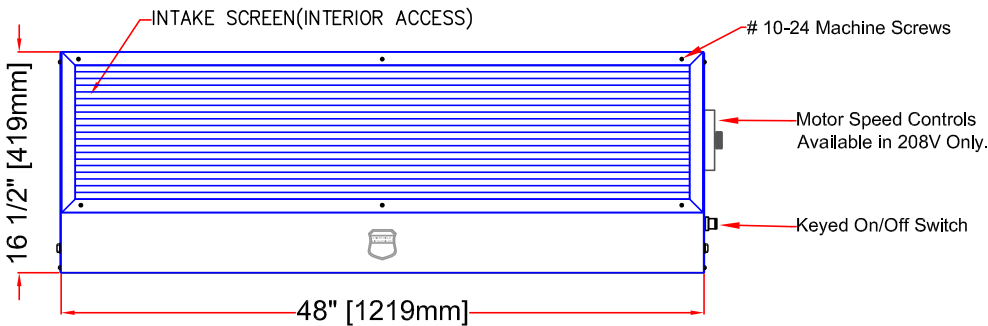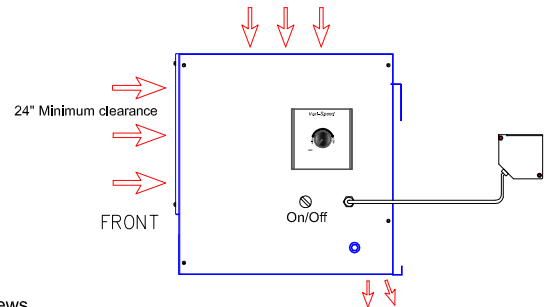

FRONT VIEW

PHOTO SENSOR w 5' OF LEAD AND MOUNTING BRACKET.
SENSOR IS FACTORY SET WITH 15 SEC OFF DELAY AND PRE PROGRAMED.
SENSOR REFLECTOR MINIMUM DISTANCE 3". MAX OF 18".
CONSULT MANUFACTURER FOR SPANS GREATER THAN 18".

CSA Certified

CS-48 Front & Top Intake

ENERSHIELD INDUSTRIES LTD 16821-113 AVENUE EDMONTON, ALBERTA T5M 2X2 PH (780) 482-4662 FAX (780) 482-4074 E-mail: info@enershield.ca www.enershield.ca	PROJECT: ENERSHIELD AIR BARRIER			MODEL: COMFORTSHIELD	MODEL#: CS-48
	VOLTAGE 208V 1phase 60 Hz	VOLTAGE 575V 1phase 60 Hz	Blowers 2	Air Velocity (fpm) (m/s)	4200/21.3
	Motor (s) TEAO 2 @ 1/2 hp = (1 hp total) 3.5 amps ea. = 7.0 amps FLA	Motor (s) TEAO 2 @ 1/2 hp = (1 hp total) 1.2 amps ea. = 2.4 amps FLA	DATE ORDERED	Air Volume (cfm) (l/s)	4100/1935
			DATE SHIPPED	Total hp/watts	1 hp/746W
				Weight lbs/Kg	170 lbs/77 Kg