
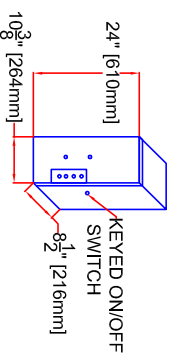
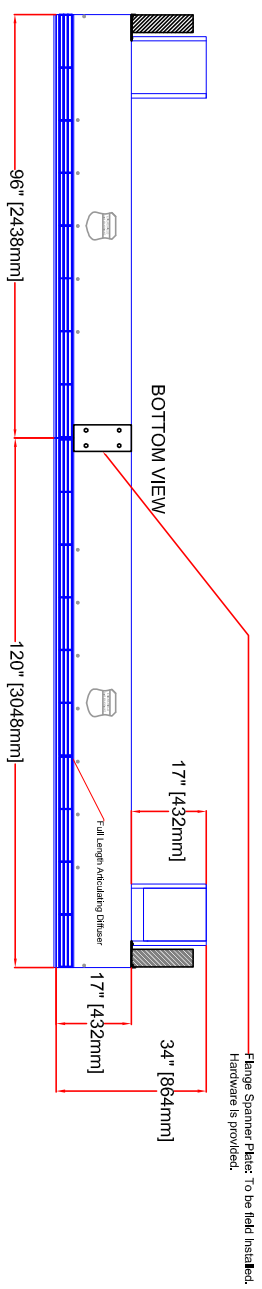


Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

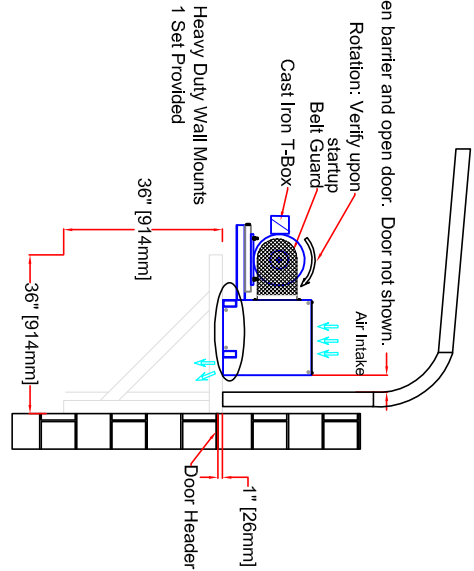


Soft Started Control Panel
Lockable NEMA 1 V2 Enclosure
Red Pilot Light
120V controls
Individual Motor Overload Protection
Keyed On/Off Switch-Key removable in both positions
Photo Sensor w 5' of lead to be field wired to control panel

CSA & CWB CERTIFIED

ENERSHIELD INDUSTRIES LTD
16821-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

DURASHIELD-HD			Blowers
Voltage	208/3/60	Motor(s)	
		2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 42	
Voltage	460/3/60	Motor(s)	
		2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 19	
Voltage	575/3/60	Motor(s)	
		2 @ 7.5 Hp, 1800 RPM, TEFC, IP55, VFD Compatible FLA 152	
			9

DURASHIELD-HD		DSH-216
Air Velocity (fpm) (m/s)		5500/27.9
Air Volume (cfm) (l/s)		29,025/13,680
Total hp/watts		15/11, 190 W
Weight lbs/Kg		1188 lbs/540 Kg

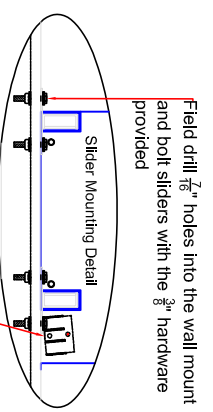

Field drill 7/8" holes into the wall mount and bolt sliders with the 3/8" hardware provided